

ANTIQUE JAVA

Fossilized® Bamboo Flooring














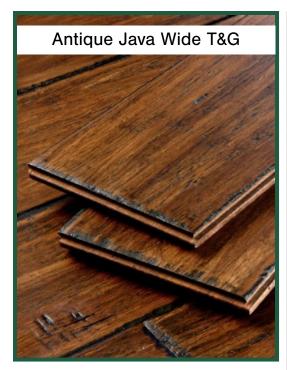

Model #	7003001000
Grain	Hand Scraped Fossilized® Strand Bamboo
Plank Length	72 inches
Plank Width	5-3/8 inches
Plank Thickness	9/16 inch
Sqft./Box	21.5 sqft.
Milling	Tongue-and-Groove
Installation Method	Glue, Float, Nail
Finish	10 Coat Durability Sealing System
Janka Hardness	3393 lbs. to 5407 lbs.
Sound Rating	IIC 67/STC 63 (with Cali Complete)
	IIC 58/STC 53 (with cork underlayment)
Indoor Air Quality	Low Emitting VOC & Prop 65 Compliant.
	Test Results Available upon Request.
Residential Warranty	50 Years
Commercial Warranty	15 Years
LEED Points	EQc4.3 MRc6** MRc7, FSC® avail-
	able upon request*
Fire Rating	Class I Interior
Certification	FloorScore Certified



Model #	7004001100
Grain	Hand Scraped Fossilized® Strand Bamboo
Plank Length	72-7/8 inches
Plank Width	5-5/16 inches
Plank Thickness	9/16 inch
Sqft./Box	21.5 sqft.
Milling	Click Lock
Installation Method	Glue, Float
Finish	10 Coat Durability Sealing System
Janka Hardness	3393 lbs. to 5407 lbs.
Sound Rating	IIC 67/STC 63 (with Cali Complete)
	IIC 58/STC 53 (with cork underlayment)
Indoor Air Quality	Low Emitting VOC & Prop 65 Compliant.
	Test Results Available upon Request.
Residential Warranty	50 Years
Commercial Warranty	15 Years
LEED Points	EQc4.3 MRc6** MRc7, FSC®
	available upon request*
Fire Rating	Class I Interior
Certification	FloorScore Certified

Color-Matched Accessories Available!









ANTIQUE JAVA

Fossilized® Bamboo Flooring















Model #	7006003500
Grain	Hand Scraped Fossilized® Strand Bamboo
Plank Length	36 inches
Plank Width	3-3/4 inches
Plank Thickness	7/16 inch
Sqft./Box	22.69 sqft.
Milling	Click Lock
Installation Method	Glue, Float
Finish	10 Coat Durability Sealing System
Janka Hardness	3393 lbs. to 5407 lbs.
Sound Rating	IIC 67/STC 63 (with Cali Complete) IIC 58/STC 53 (with cork underlayment)
Indoor Air Quality	Low Emitting VOC & Prop 65 Compliant. Test Results Available upon Request.
Residential Warranty	50 Years
Commercial Warranty	15 Years
LEED Points	EQc4.3 MRc6** MRc7, FSC® available upon request*
Fire Rating	Class I Interior
Certification	FloorScore Certified

^{*}Use a minimum of 50% (based on cost) of wood-based materials and products that are certified in accordance with the Forest Stewardship Council's principles an criteria, for wood building components.

**Use rapidly renewable building materials and products for 2.5% of the total value of all building materials.







